


This drawing, specifications, and concepts contained here in are the sole property of Red Barn Machine, and may not be reproduced or used in any fashion without the prior written permission of Red Barn Machine.

REVISIONS			
REV	DESCRIPTION	DATE	INITIAL
A	ADDED MISSING DIMS FOR -5 (.700, 1.000, AND R.125)	6-25-12	JAG
			GE

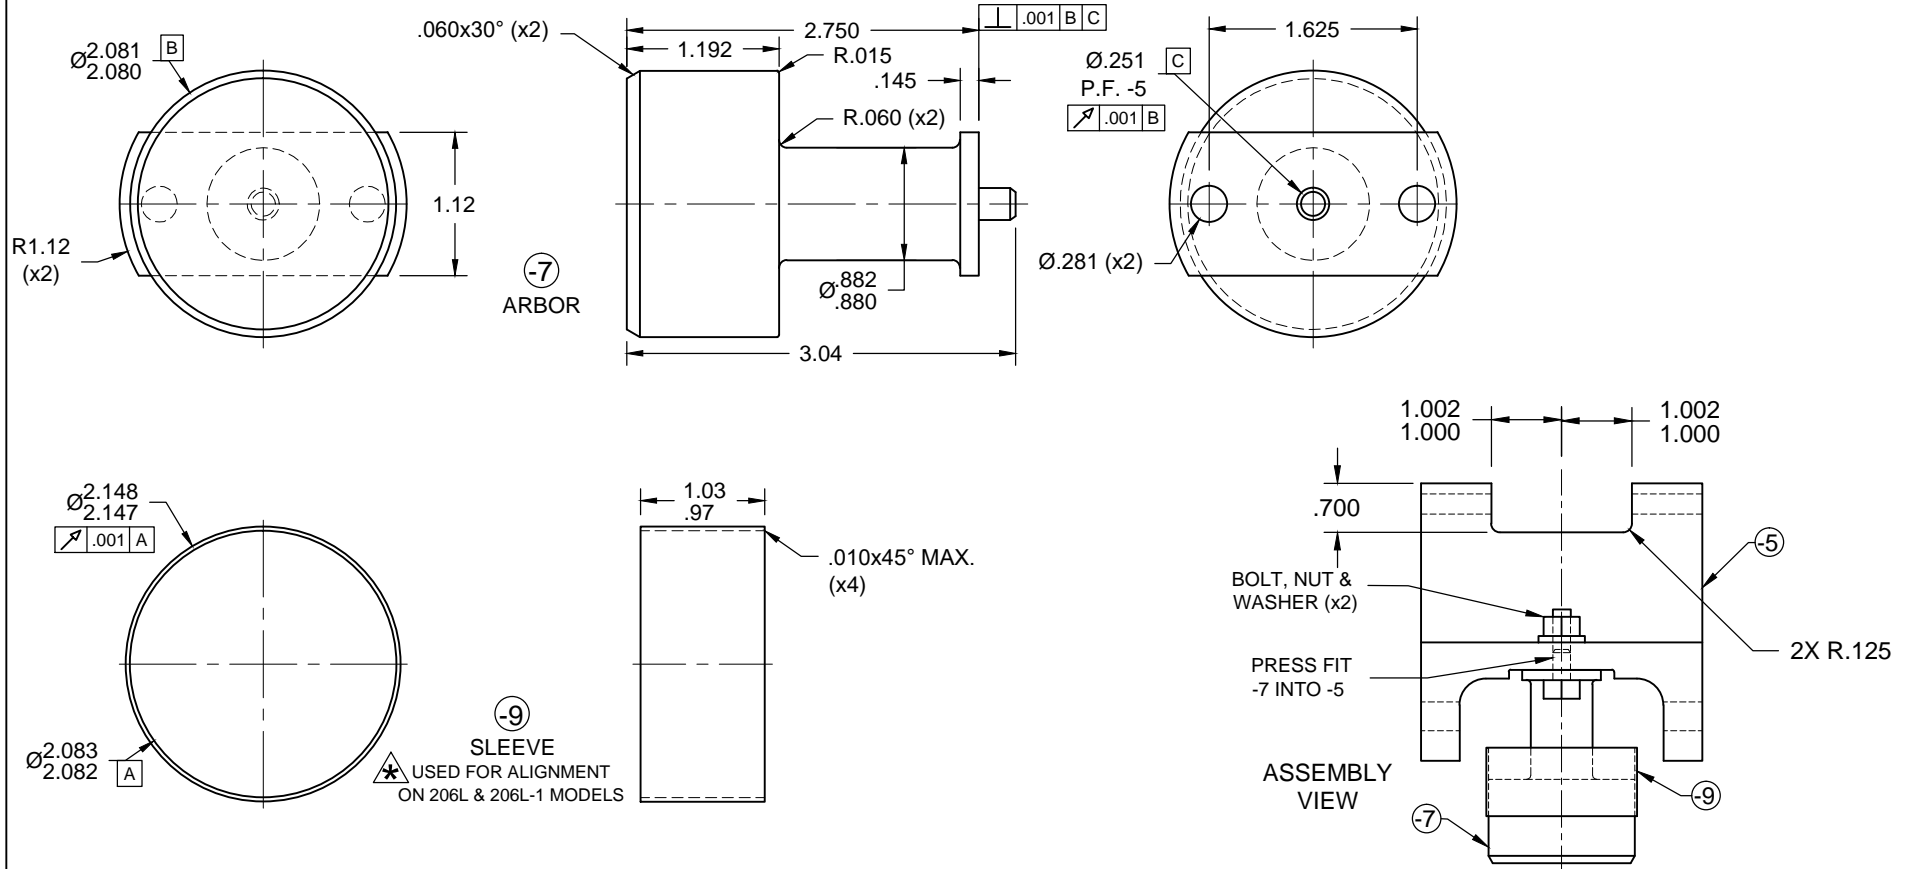

ASSY QTY	ASSY QTY	B/O	PART #	UNIT QTY	DESCRIPTION	MATERIAL	B/O INFORMATION OR SPECIFICATIONS
			-5	1	SUPPORT CASTING	CAST IRON	MAKE FROM T101532-3C
			-7	1	ARBOR	17-4 PH S.S. RND. BAR	$\varnothing 2-1/4 \times 3-1/2$
			-9	1	SLEEVE	303 or 304 S.S. RND. BAR	$\varnothing 2-1/4 \times 1-1/4$
				2	BOLT		1/4-28 UNF x 15/16 AN4-7A
				2	WASHER		1/4 AN960-416
				2	LOCK NUT		1/4-28 UNF NAS679 A4
ASSY #							

RED BARN MACHINE			
TITLE SUPPORT ASSEMBLY - SCOPE ASSEMBLY; BLADE ALIGNMENT			
DWG NO.	RB T101532		REV A
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		DRAWN BY: PERRITT	
TOLERANCES ON:		APPROVED <i>D Weil</i>	
DECIMALS		HEAT TREAT	
XXX $\pm .005$		FINISH	
XX $\pm .01$		SPEC	
X $\pm .1$		USED ON MODEL	
UNLESS OTHERWISE SPECIFIED 1. BREAK ALL SHARP EDGES .025 x 45° PR .025 R		206A, 206A-1, 0H-S8A	
2. DIMENSIONAL LIMITS APPLY AFTER PLATING		206L & 206L-1	
SCALE	NTS	DATE	7-3-08
		SHEET	1 of 1